

RefLED R50

RefLED R50 V4 470LM 830 E14 SL
0029205



Product features

- Energy efficient LED alternative for traditional incandescent and halogen blown reflector lamp
- Modern construction and attractive design
- Mercury free solution
- Long average rated lifetime: 15,000 hours
- Lower maintenance cost compared to traditional lamps
- Non-dimmable
- 3 years warranty
- Perfect for general lighting applications: residential lighting, down lights, hotels, hotels, restaurants, bars, lobbies, corridors, halls, etc



NOTES

undefined

PRODUCT OVERVIEW

Product name	RefLED R50 V4 470LM 830 E14 SL
Technology	LED
Watt (Rated) (W)	4.9
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741085
Warranty	3 years
Luminous flux (lm)	470
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Wattage (W)	4.9
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288292052

RefLED R50

RefLED R50 V4 470LM 830 E14 SL
0029205

DATA TABLE

General data

Product name	RefLED R50 V4 470LM 830 E14 SL
Technology	LED
Watt (Rated) (W)	4.9
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741085
Warranty	3 years

Optical data

Luminous flux (lm)	470
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	4.9
Equivalent watt (W)	40
Product Voltage (V)	230
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	No
Dimmable	No
Inrush Current (A)	1.5
Inrush Duration (µs)	240
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	107
Max. Luminaires per 16A B Breaker	53

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000

RefLED R50

RefLED R50 V4 470LM 830 E14 SL
0029205

Average life (Rated) (h)	15000
--------------------------	-------

Physical data

Nominal Product Length (mm)	82.5
Nominal Product Diameter (mm)	50
Weight (kg)	0.024


Packaging

Single packaging type	Carton
Product EAN number	5410288292052
Packaging single length / height (cm)	5.0
Packaging single width (cm)	5.0
Packaging single depth (cm)	8.3
DUN14 (outer)	15410288292059
Units per outer package	6
Packaging outer length / height (cm)	15.8
Packaging outer width (cm)	10.7
Packaging outer depth (cm)	9.1

Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures


PHOTOMETRY

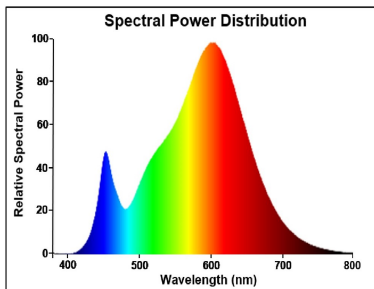

TECHNICAL DRAWINGS


RefLED R50

RefLED R50 V4 470LM 830 E14 SL
0029205



SYLVANIA

0029205

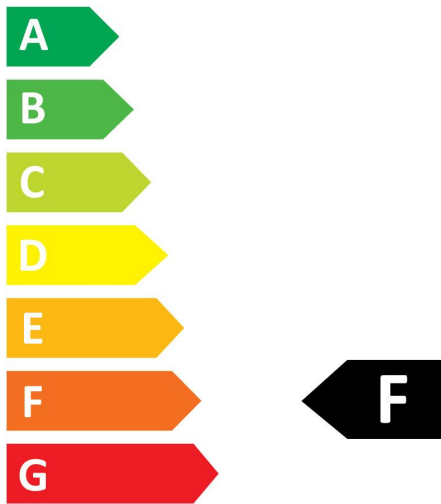

5
kWh/1000h



2019/2015

SYLVANIA

RefLED R50

RefLED R50 V4 470LM 830 E14 SL

0029205



0029205



5
kWh/1000h



2019/2015